


COUNTY-S EVO




COUNTY-S EVO

County-s evo is a motorized counting machine for taped SMD component counting. It can operate in two different ways:

1) TOTALIZER: components are counted from a zero reference, tape feed is motorized and the counter automatically stops at the tape end, to prevent loss of the total

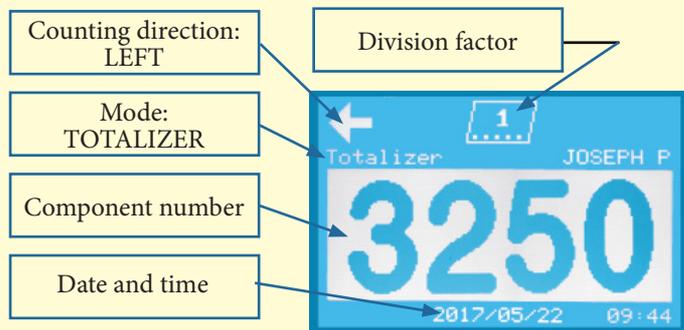

2) PRESET MODE: the desired component number is keyed on the keyboard and the counter automatically stops when it reaches the corresponding component

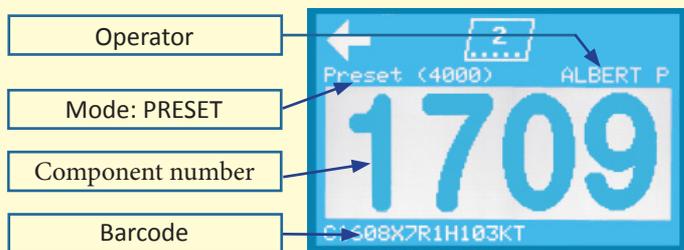

EMPTY POCKET CHECK

Checks the presence of the component
Programmable Stop: Never - 1 - 2
It only works on black plastic tapes



EPC disabled



EPC enabled




EPC counting



TECHNICAL FEATURES

- Counting: max 999999 pcs, 6 digits 22mm height
- Maximum counting speed: 220pcs/sec (1 piece for hole)
- Pitch (holes for component): from 1/4 - 1/3 - 1/2 - 1 - 2 - ... - 19
- Maximum tape height: 56mm
- Maximum reel diameter: 400mm (standard configuration) 650mm (with **8301.150** support)
- Display: blue LCD with led backlight 160x104 pixel visible area: 74x46mm
- Adjustable speed control
- Step by step mode (1 component at a time)
- Empty pocket check (optional)
- Barcode reader input
- Serial connection for label printer or PC
- Selection of the operator (10 operators can be memorized with 8 alphanumerical chars everyone)
- Internal clock (1 week backup)
- Datalogger that stores the last 500 counting data
- Memory storage for subtotals
- 2 side handles for easy transport.
- Dimensions: 525 x 340 x 250(H) mm
- Weight: 9,5 Kg

Infrared ray

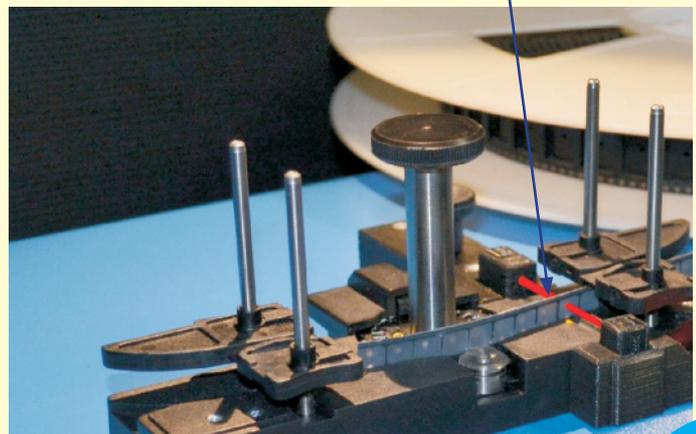

COUNTY-S EVO

County-S EVO control keyboard



- 8301.131 County-S EVO 230V/50-60Hz
- 8301.133 County-S EVO 230V/50-60Hz with Empty Pocket Check
- 8301.141 County-S EVO 115V/50-60Hz
- 8301.143 County-S EVO 115V/50-60Hz with Empty Pocket Check
- 8301.350 ISO9000 Traceable® Certificate

8301.150 Support for reels > 400mm diameter

- 8301.110 Empty Reel, aluminium made, 350mm diameter
- 8301.155 Barcode with coiled cord
- 8301.095 Direct thermal label printer
- 8301.096 57x51mm, 1360 labels/roll

PRINTER

For County EVO and County-S EVO

Direct thermal label printer built for ease-of-use and durability, ac adaptor 110-230Vac and data cable included.


Maximum print width is 104mm however the print is optimized for 57x51mm labels

- 8301.095 Direct thermal label printer
- 8301.096 57x51mm, 1360 labels/roll



PRINTER

EMPTY REEL aluminium made diameter 360mm (cod. 8301.110)

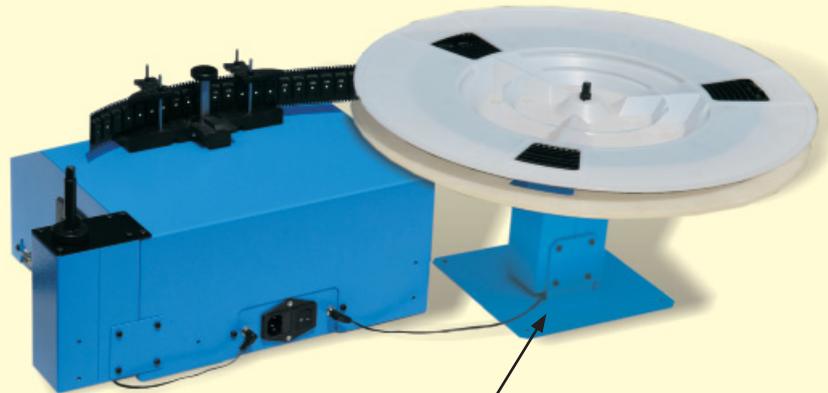

Support for reels with diameter > 400mm (cod. 8301.150)

BARCODE (for County EVO and County-S EVO)

It's small, lightweight and ergonomic design, coiled cable included, a wider than usual scan angle provides the ability to read a longer bar code from a shorter distance, IP42 protection.

The barcode is connected and powered via a single cable, without the hassle of two separate cables1

- 8301.155 Barcode with coiled cord

